



**PRODUCT SPECIFICATION SHEET**  
**Ti-6Al-4V Grade 23**  
**-150 μm/+45 μm**

**CHEMICAL COMPOSITION:**


Element	Typical Gr. 23 (% wt.)
Titanium	Balance
Aluminum	5.50 - 6.50
Vanadium	3.50 - 4.50
Carbon	< 0.08
Oxygen	< 0.13
Nitrogen	< 0.03
Hydrogen	< 0.0125
Iron	< 0.25
Other each, max	0.10
Other total, max	0.40

**APPARENT DENSITY:**


2.60-2.65 g/cm<sup>3</sup>

**HALL FLOWMETER:**

21-26 s

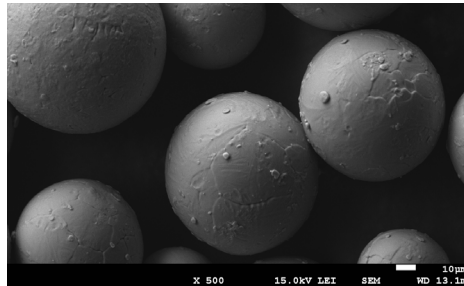

**PARTICLE SIZE DISTRIBUTION (LASER DIFFRACTION):**

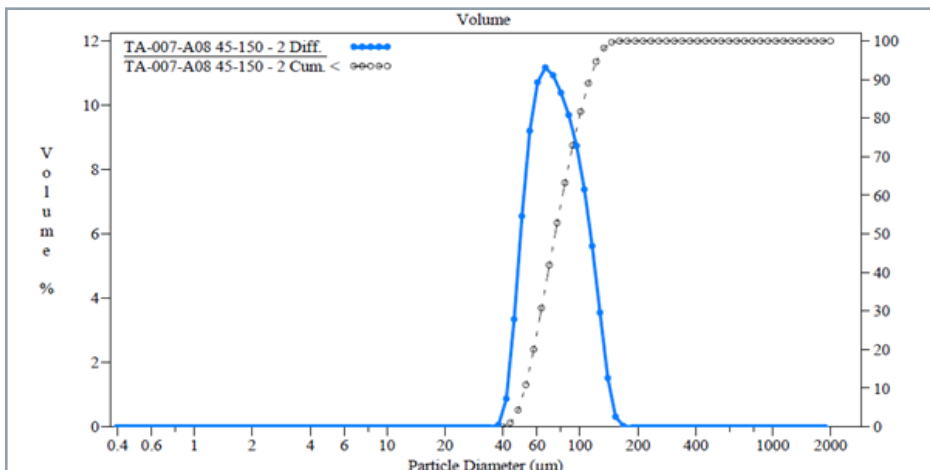

**d10: 50 μm-55 μm • d50: 75 μm-85 μm • d90: 113 μm-120 μm**



**PLASMA ATOMIZED**

**IDEAL FOR ADDITIVE  
MANUFACTURING**

**EXCELLENT FLOWABILITY**

**HIGHLY SPHERICAL**

**HIGH PACKING DENSITY**

**LOW POROSITY**

**LITTLE TO NO SATELLITES**

**HIGH CHEMICAL PURITY**

**TSXV: PYR • OTCQB: PYRNF**

For more information, please contact:

**Business Development Department  
PyroGenesis Additive**

[powders@pyrogenesis.com](mailto:powders@pyrogenesis.com)

T. +1 (514) 937-0002

F. +1 (514) 937-5757